


CAR RADIO

From October 1998, the car will be equipped as standard with a new radio model. This includes radio and cassette functions - and can also be fitted with a CD player if required.

19. Selecting medium/long wavelengths.

NOTE: The CD player and connection wiring do not come with the car.

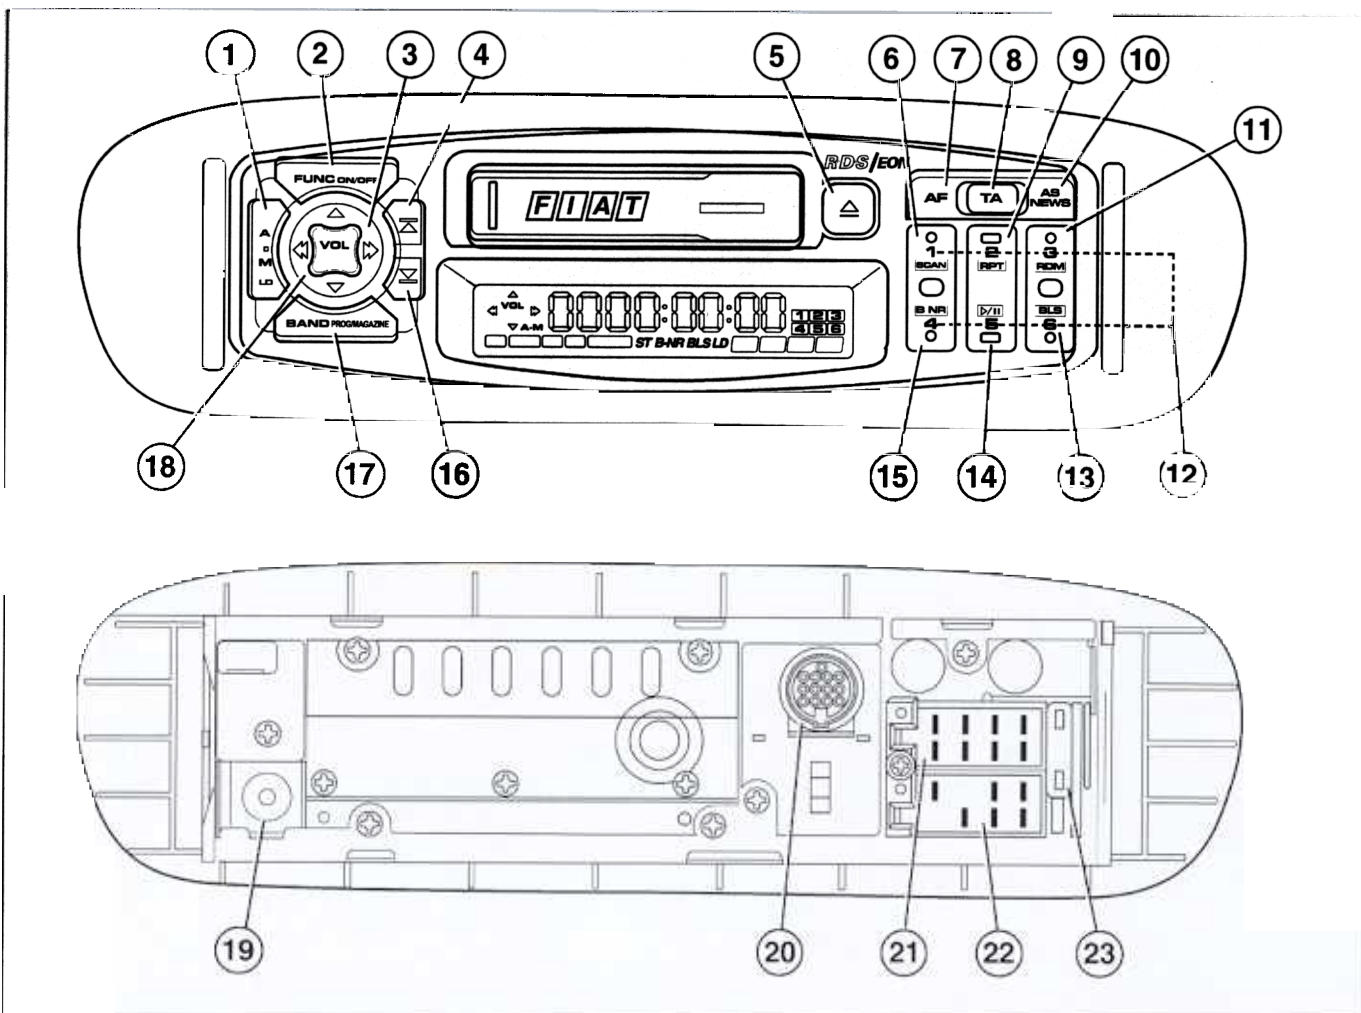

P3W01BL01

1. Selecting audio regulation (bass/treble tones, balance, fader, loudness)
2. Turning on/off and selecting radio, cassette, CD player.
3. Adjusting volume (up/down), treble and fader
4. Selecting the next CD
5. Ejecting the cassette
6. Scanning cassette/CD tracks
7. Searching for alternative frequencies
8. Repeating cassette/CD track
9. Selecting TA function
10. Selecting PTY NEWS function
11. Random playing of CD tracks
12. Selecting stored stations
13. Selecting BLS function
14. Selecting MUTE function
15. Selecting Dolby NR function
16. Selecting previous CD
17. Selecting radio band, manual tuning. Changing cassette side, CD cartridge
18. Adjusting (left/right), bass, balance, manual/automatic tuning, distant/local, tape fast forward/rewind, cassette track or previous/next CD, CD track fast forward/rewind.
19. Aerial lead connection
20. Connector for CD player connection
21. Connector for supply connection
22. Connector for speaker connection
23. 10A fuse


55.

SPECIFICATIONS

The main specifications of this radio are as follows:

- Power 4x30W, frequency response 30-20000 Hz, separate control of tone, balance, loudness and mute.
- PLL FM/MW/LW tuner, automatic storage of 6 stations (Autostore) or manual storage of 24 stations (18 FM and 6 AM), automatic Stereo/Mono selection and RDS system with TA/PTY NEWS/EON/REG/AF functions.
- Autoreverse stereo player with servo-assisted mechanical system, automatic Cr/Me equalisation, Dolby B and Pause/Blank skip/Scan functions.

NOTE For further details of operation and for a full description of radio controls, refer to the special supplement to the Owner's Handbook provided with the car.

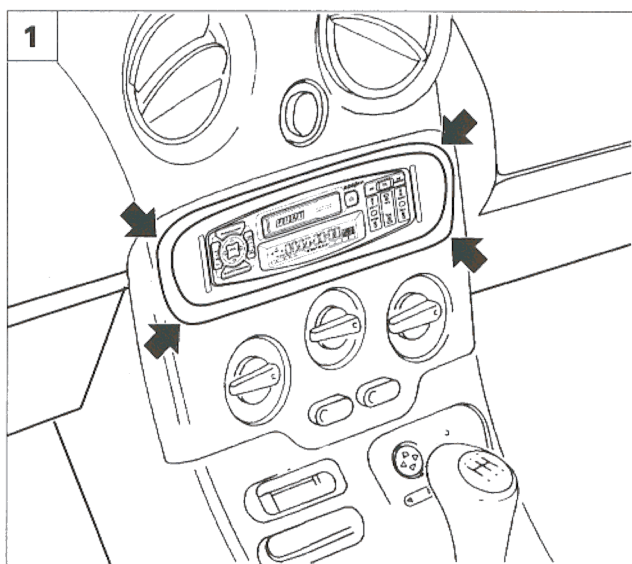


P3W02BL01


REMOVING-REFITTING CAR RADIO

- 1 Remove the two press-fitted side trim sections
2. Insert both tools provided with the radio into the side slots and press until tooth (A) engages as shown in the detail. Then pull out the radio to remove.
3. Disconnect electrical connections (A) and aerial lead (B), and remove the radio

NOTE To refit, it is NOT necessary to use the above tools. Simply push in the radio until it clicks into place.

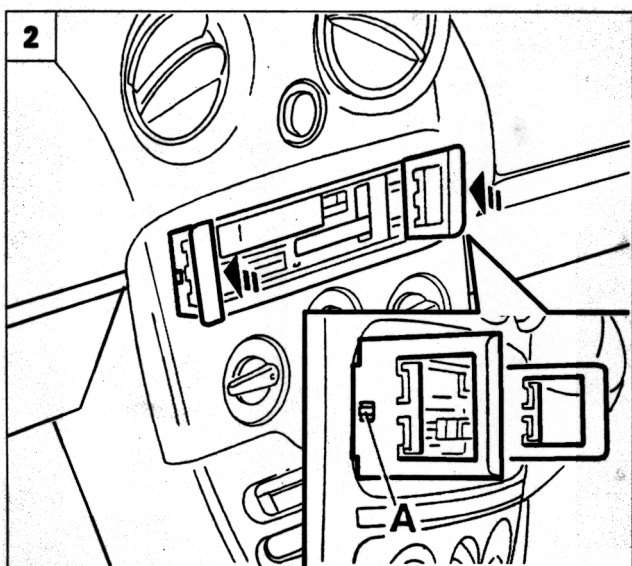

P3W02BL02

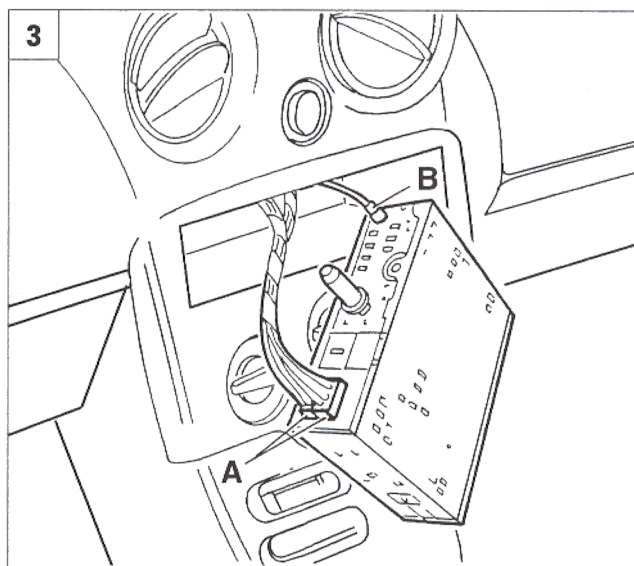

P3W065L03